

10

Track Spots

Pages 269-300

COB LED | SMD LED | LED | GU10 | Rx7s | HQI | PAR30 | E27 | CDM-R
Die cast | Natural aluminium



Cylindrical Track Spot




65608T | 3x1W | LED | Die cast



IP20

offer




65608T | 3x1W | LED | Die cast



IP20

offer





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65608T/G/D	Grey	Daylight	6000K	3x1W	217lm	60°	230V		30	Complete with driver
65608T/G/W	Grey	Warm white	3000K	3x1W	205lm	60°	230V		30	Complete with driver



The COB Dark Light Range



65610AT | 10W | COB LED | Aluminium



65620AT | 20W | COB LED | Aluminium




Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⊞	Notes
65610AT/W/C	White	Cool white	4000K	10W	800lm	38°	230V	⊞	20	Complete with 300mA driver
65610AT/W/W	White	Warm white	3000K	10W	800lm	38°	230V	⊞	20	Complete with 300mA driver
65610AT/B/W	Black	Warm white	3000K	10W	800lm	38°	230V	⊞	20	Complete with 300mA driver
65620AT/W/C	White	Cool white	4000K	20W	1500lm	38°	230V	⊞	10	Complete with 500mA driver
65620AT/W/W	White	Warm white	3000K	20W	1500lm	38°	230V	⊞	10	Complete with 500mA driver
65620AT/B/W	Black	Warm white	3000K	20W	1500lm	38°	230V	⊞	10	Complete with 500mA driver

The COB Track Spot Range


Aluminium




65611T | 15W | COB LED | Aluminium




IP20



65612T | 30W | COB LED | Aluminium



IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	ⓧ	Notes
65611T/G/W	Grey	Warm white	3000K	15W	1100lm	36°	230V	ⓧ	12	Complete with 350mA driver
65612T/W/W	White	Warm white	3000K	30W	2300lm	36°	230V	ⓧ	9	Complete with 700mA driver
65612T/G/C	Grey	Cool white	4000K	30W	2400lm	36°	230V	ⓧ	9	Complete with 700mA driver





The COB Track Spot Range



Aluminium



65614T | 45W | COB LED | Aluminium



65616T | 50W | COB LED | Aluminium



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	Box	Notes
65614T/W/W	White	Warm white	3000K	45W	3500lm	36°	230V	⌚	9	Complete with 1000mA driver
65616T/B/C	Black	Cool white	4000K	50W	4200lm	38°	230V	⌚	6	Complete with 1200mA driver
65616T/B/W	Black	Warm white	3000K	50W	4000lm	38°	230V	⌚	6	Complete with 1200mA driver




The COB Track Spot Range


Aluminium




65611NT | 15W | COB LED | Aluminium




IP20




65612NT | 30W | COB LED | Aluminium




IP20



65614NT | 42W | COB LED | Aluminium



IP20




Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	Box	Notes
65611NT/W/C	White	Cool white	4000K	15W	1300lm	38°	230V	⚡	10	Complete with 400mA driver
65611NT/W/W	White	Warm white	3000K	15W	1200lm	38°	230V	⚡	10	Complete with 400mA driver
65612NT/W/C	White	Cool white	4000K	30W	2500lm	38°	230V	⚡	10	Complete with 750mA driver
65612NT/W/W	White	Warm white	3000K	30W	2400lm	38°	230V	⚡	10	Complete with 750mA driver
65614NT/W/C	White	Cool white	4000K	42W	3500lm	38°	230V	⚡	10	Complete with 1050mA driver
65614NT/W/W	White	Warm white	3000K	42W	3400lm	38°	230V	⚡	10	Complete with 1050mA driver

The COB Track Spot Range



Aluminium




65611NT | 15W | COB LED | Aluminium




IP20




65612NT | 30W | COB LED | Aluminium




IP20



65614NT | 42W | COB LED | Aluminium



IP20




Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65611NT/B/C	Black	Cool white	4000K	15W	1300lm	38°	230V	⌚	10	Complete with 400mA driver
65611NT/B/W	Black	Warm white	3000K	15W	1200lm	38°	230V	⌚	10	Complete with 400mA driver
65612NT/B/C	Black	Cool white	4000K	30W	2500lm	38°	230V	⌚	10	Complete with 750mA driver
65612NT/B/W	Black	Warm white	3000K	30W	2400lm	38°	230V	⌚	10	Complete with 750mA driver
65614NT/B/C	Black	Cool white	4000K	42W	3500lm	38°	230V	⌚	10	Complete with 1050mA driver
65614NT/B/W	Black	Warm white	3000K	42W	3400lm	38°	230V	⌚	10	Complete with 1050mA driver



The COB Cylinder Track Spot





65642AT | 10W | COB LED | Aluminium



65642BT | 20W | COB LED | Aluminium



65642CT | 30W | COB LED | Aluminium



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	Box	Notes
65642AT/W/C	White	Cool white	4000K	10W	850lm	38°	230V		24	Complete with 250mA driver
65642AT/W/W	White	Warm white	3000K	10W	800lm	38°	230V		24	Complete with 250mA driver
65642BT/W/C	White	Cool white	4000K	20W	1700lm	38°	230V		18	Complete with 500mA driver
65642BT/W/W	White	Warm white	3000K	20W	1600lm	38°	230V		18	Complete with 500mA driver
65642CT/W/C	White	Cool white	4000K	30W	2600lm	38°	230V		15	Complete with 750mA driver
65642CT/W/W	White	Warm white	3000K	30W	2400lm	38°	230V		15	Complete with 750mA driver



65642BT/B/C




65642CT/B/C

The COB Cylinder Track Spot

A-A⁺⁺


65642AT | 10W | COB LED | Aluminium




IP20

A-A⁺⁺


65642BT | 20W | COB LED | Aluminium




IP20

A-A⁺⁺

65642CT | 30W | COB LED | Aluminium



IP20






Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	Box	Notes
65642AT/B/C	Black	Cool white	4000K	10W	850lm	38°	230V	⌚	24	Complete with 250mA driver
65642AT/B/W	Black	Warm white	3000K	10W	800lm	38°	230V	⌚	24	Complete with 250mA driver
65642BT/B/C	Black	Cool white	4000K	20W	1700lm	38°	230V	⌚	18	Complete with 500mA driver
65642BT/B/W	Black	Warm white	3000K	20W	1600lm	38°	230V	⌚	18	Complete with 500mA driver
65642CT/B/C	Black	Cool white	4000K	30W	2600lm	38°	230V	⌚	15	Complete with 750mA driver
65642CT/B/W	Black	Warm white	3000K	30W	2400lm	38°	230V	⌚	15	Complete with 750mA driver

The COB Cylinder Range




65646T | 8W | COB LED | Aluminium

new
IP20





65108T | 8W | COB LED | Aluminium

IP20





65632T | 35W | COB LED | Aluminium

IP20



65632CT | 50W | COB LED | Die cast

IP20



Order Code	Colour	Reflector	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65646T/W/W	White	-	Warm white	3000K	8W	650lm	36°	230V	⌚	24	AC LED
65646T/B/W	Black	-	Warm white	3000K	8W	650lm	36°	230V	⌚	24	AC LED
65108T/W/W	White	Black	Warm white	3000K	8W	560lm	36°	230V	⌚	24	Complete with 350mA driver
65108T/B/W	Black	Brass	Warm white	3000K	8W	560lm	36°	230V	⌚	24	Complete with 350mA driver
65632T/W/C	White	-	Cool white	4000K	35W	3300lm	36°	230V	⌚	9	Complete with 900mA driver
65632T/W/W	White	-	Warm white	3000K	35W	3200lm	36°	230V	⌚	9	Complete with 900mA driver
65632CT/W/C	White	-	Cool white	4000K	50W	4000lm	36°	230V	⌚	6	Complete with 1250mA driver
65632CT/W/W	White	-	Warm white	3000K	50W	3750lm	36°	230V	⌚	6	Complete with 1250mA driver
65632CT/B/W	Black	-	Warm white	3000K	50W	3750lm	36°	230V	⌚	6	Complete with 1250mA driver



The COB Dark Light Cylinder Range

Die cast



A-A++

65640AT | 10W | COB LED | Die cast




A-A++

65640BT | 36W | COB LED | Die cast



15° Reflector for 65640BT.
Order code 0740/15.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	Box	Notes
65640AT/W/W	White	Warm white	3000K	10W	730lm	36°	230V	⌚	24	Complete with 500mA driver
65640BT/W/C	White	Cool white	4000K	36W	2500lm	36°	230V	⌚	16	Complete with 900mA driver
65640BT/W/W	White	Warm white	3000K	36W	2400lm	36°	230V	⌚	16	Complete with 900mA driver




The COB Side Box Range




A-A++ 65620TA/W/C

IP20

65620TA | 15W | COB LED | Die cast





65620TA/W/W

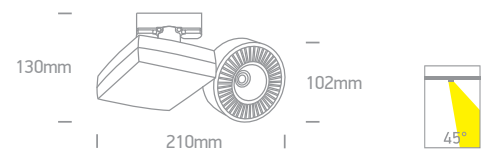

A-A++

IP20



65620T | 20W | COB LED | Aluminium

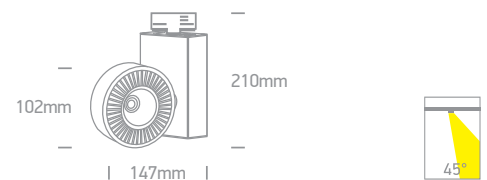

A-A++

IP20

65620T2 | 2x15W | COB LED | Aluminium

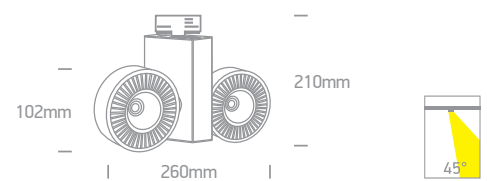

Ideal for corridors, left & right shelves illumination.

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	Box	Notes
65620TA/W/C	White	Cool white	4000K	15W	1200lm	45°	230V	⚡	12	Complete with 400mA driver
65620TA/W/W	White	Warm white	3000K	15W	1095lm	45°	230V	⚡	12	Complete with 400mA driver
65620T/W/W	White	Warm white	3000K	20W	1460lm	45°	230V	⚡	12	Complete with 500mA driver
65620T2/W/C	White	Cool white	4000K	2x15W	2x1200lm	45°	230V	⚡	6	Complete with 700mA driver


The COB Track Spots




A-A++ 65628T/W/C

IP20

65628T | 15W | COB LED | Aluminium




65628T/B/C




A-A++ 65630T/W/C

IP20

65630T | 25W | COB LED | Die cast




65630T/W/W




A-A++ 65626T/W/C

IP20

65626T | 25W | COB LED | Die cast



65626T/W/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	Box	Notes
65628T/W/C	White	Cool white	4000K	15W	1200lm	45°	230V	⌚	12	Complete with 400mA driver
65628T/W/W	White	Warm white	3000K	15W	1095lm	45°	230V	⌚	12	Complete with 400mA driver
65628T/B/C	Black	Cool white	4000K	15W	1200lm	45°	230V	⌚	12	Complete with 400mA driver
65628T/B/W	Black	Warm white	3000K	15W	1095lm	45°	230V	⌚	12	Complete with 400mA driver
65630T/W/C	White	Cool white	4000K	25W	1900lm	45°	100-240V	⌚	12	Complete with 580mA driver
65630T/W/W	White	Warm white	3000K	25W	1800lm	45°	100-240V	⌚	12	Complete with 580mA driver
65626T/W/C	White	Cool white	4000K	25W	2000lm	45°	100-240V	⌚	12	Complete with 580mA driver
65626T/W/W	White	Warm white	3000K	25W	1900lm	45°	100-240V	⌚	12	Complete with 580mA driver

The COB Top Box Range




A-A++ 65618T/W/C

IP20

65618T | 35W | COB LED | Die cast


65618T/G/C




A-A++ 65619T/W/C

IP20

65619T | 38W | COB LED | Aluminium


65619T/B/C

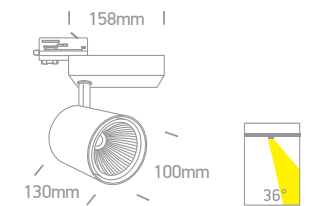
15° Reflector for 65619T.
Order code 0742/15.



A-A++

IP20

65624T | 35W | COB LED | Die cast


A-A++

IP20

65638T | 50W | COB LED | Die cast


Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65618T/W/C	White	Cool white	4000K	35W	3350lm	45°	230V	⌚	12	Complete with 900mA driver
65618T/W/W	White	Warm white	3000K	35W	3200lm	45°	230V	⌚	12	Complete with 900mA driver
65618T/G/C	Grey	Cool white	4000K	35W	3350lm	45°	230V	⌚	12	Complete with 900mA driver
65619T/W/C	White	Cool white	4000K	38W	3200lm	36°	230V	⌚	16	Complete with 900mA driver
65619T/W/W	White	Warm white	3000K	38W	3000lm	36°	230V	⌚	16	Complete with 900mA driver
65619T/B/C	Black	Cool white	4000K	38W	3200lm	36°	230V	⌚	16	Complete with 900mA driver
65619T/B/W	Black	Warm white	3000K	38W	3000lm	36°	230V	⌚	16	Complete with 900mA driver
65624T/W/C	White	Cool white	4000K	35W	3050lm	45°	230V	⌚	12	Complete with 900mA driver
65624T/W/W	White	Warm white	3000K	35W	2950lm	45°	230V	⌚	12	Complete with 900mA driver
65638T/W/C	White	Cool white	4000K	50W	3700lm	36°	230V	⌚	12	Complete with 1200mA driver


The COB Side Box Range

Die cast




A-A⁺⁺

65226T | 26W | COB LED | Die cast



IP20



A-A⁺⁺


65622T | 34W | COB LED | Die cast



IP20



Optional 18° reflector.
Order code 0730/18.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⊞	Notes
65226T/W/W	White	Warm white	3000K	26W	1960lm	30°	100-240V	⊞	8	Complete with driver
65622T/W/C	White	Cool white	4000K	34W	3550lm	42°	230V	⊞	12	Complete with 900mA driver
65622T/W/W	White	Warm white	3000K	34W	3350lm	42°	230V	⊞	12	Complete with 900mA driver



65652T/W/W



65644T/W/W


The Honeycomb Range




A-A++ 65644T/W/W

65644T | 8W | COB LED | Dimmable | Aluminium

Complete with honeycomb.




65644T/B/W




A-A++ 65652T/W/W

65652T | 30W | COB LED | Die cast

Complete with honeycomb.



65652T/B/W




Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	Box	Notes
65644T/W/W	White	Warm white	3000K	8W	600lm	36°	230V	⌚	24	AC LED
65644T/B/W	Black	Warm white	3000K	8W	600lm	36°	230V	⌚	24	AC LED
65652T/W/C	White	Cool white	4000K	30W	1800lm	24°	230V	⌚	12	Complete with 700mA driver
65652T/W/W	White	Warm white	3000K	30W	1700lm	24°	230V	⌚	12	Complete with 700mA driver
65652T/B/C	Black	Cool white	4000K	30W	1800lm	24°	230V	⌚	12	Complete with 700mA driver
65652T/B/W	Black	Warm white	3000K	30W	1700lm	24°	230V	⌚	12	Complete with 700mA driver


The Zoomable Range



65650T | 30W | COB LED | Adjustable beam 20°-60° | Aluminium



65648T | 30W | COB LED | Adjustable beam 12°-60° | Aluminium



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	Ⓛ	Notes
65650T/W/C	White	Cool white	4000K	30W	2400lm	20°-60°	230V	Ⓛ	15	Complete with 750mA driver
65650T/W/W	White	Warm white	3000K	30W	2300lm	20°-60°	230V	Ⓛ	15	Complete with 750mA driver
65650T/B/C	Black	Cool white	4000K	30W	2400lm	20°-60°	230V	Ⓛ	15	Complete with 750mA driver
65650T/B/W	Black	Warm white	3000K	30W	2300lm	20°-60°	230V	Ⓛ	15	Complete with 750mA driver
65648T/B/C	Black	Cool white	4000K	30W	2550lm	12°-60°	120-240V	Ⓛ	12	Complete with 700mA driver
65648T/B/W	Black	Warm white	3000K	30W	2550lm	12°-60°	120-240V	Ⓛ	12	Complete with 700mA driver



LED Linear Track Light



A-A++ 65018T/W/W

65018T | 16W | SMD 2835 | Linear light | Aluminium + PC



new

IP20



65018T/B/W



A-A++ 65025T/W/W

65025T | 25W | SMD 2835 | Linear light | Aluminium + PC



new

IP20



65025T/B/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65018T/W/C	White	Cool white	4000K	16W	1600lm	110°	100-240V	⌚	12	Complete with 400mA driver
65018T/W/W	White	Warm white	3000K	16W	1600lm	110°	100-240V	⌚	12	Complete with 400mA driver
65018T/B/C	Black	Cool white	4000K	16W	1600lm	110°	100-240V	⌚	12	Complete with 400mA driver
65018T/B/W	Black	Warm white	3000K	16W	1600lm	110°	100-240V	⌚	12	Complete with 400mA driver
65025T/W/C	White	Cool white	4000K	25W	2500lm	110°	100-240V	⌚	12	Complete with 600mA driver
65025T/W/W	White	Warm white	3000K	25W	2500lm	110°	100-240V	⌚	12	Complete with 600mA driver
65025T/B/C	Black	Cool white	4000K	25W	2500lm	110°	100-240V	⌚	12	Complete with 600mA driver
65025T/B/W	Black	Warm white	3000K	25W	2500lm	110°	100-240V	⌚	12	Complete with 600mA driver


Adjustable LED Linear Track Light




A-A++ 65024T/W/C

IP20

65024T | 10x5W | COB LED | Linear track light | Aluminium + plastic




65024T/B/C

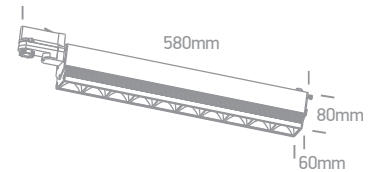


A-A++ 65026T/W/C

IP20

65026T | 40W | SMD 2835 | Linear track light | Aluminium + plastic



65026T/B/C



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65024T/W/C	White	Cool white	4000K	10x5W	10x425lm	30°	230V		10	Complete with 500mA driver
65024T/W/W	White	Warm white	3000K	10x5W	10x400lm	30°	230V		10	Complete with 500mA driver
65024T/B/C	Black	Cool white	4000K	10x5W	10x425lm	30°	230V		10	Complete with 500mA driver
65024T/B/W	Black	Warm white	3000K	10x5W	10x400lm	30°	230V		10	Complete with 500mA driver
65026T/W/C	White	Cool white	4000K	40W	3400lm	100°	230V		10	Complete with 450mA driver
65026T/W/W	White	Warm white	3000K	40W	3200lm	100°	230V		10	Complete with 450mA driver
65026T/B/C	Black	Cool white	4000K	40W	3400lm	100°	230V		10	Complete with 450mA driver
65026T/B/W	Black	Warm white	3000K	40W	3200lm	100°	230V		10	Complete with 450mA driver



65042T/B/C



65510T/B



65020T/B/W

The Track Floodlight Range


Die cast




A-A+ 65020T/W/C

IP20

65020T | 20W | SMD 3030 | Die cast




65020T/B/C




A-A+ 65042T/W/W

IP20

65042T | 42W | SMD 2835 | Die cast



65042T/B/W



B-A+ 65510T/W


IP20

offer

65510T | 70W | HQI | Rx7s | Die cast



65510T/B



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65020T/W/C	White	Cool white	4000K	20W	1500lm	24°	230V	⌚	20	Complete with 600mA driver
65020T/W/W	White	Warm white	3000K	20W	1400lm	24°	230V	⌚	20	Complete with 600mA driver
65020T/B/C	Black	Cool white	4000K	20W	1500lm	24°	230V	⌚	20	Complete with 600mA driver
65020T/B/W	Black	Warm white	3000K	20W	1400lm	24°	230V	⌚	20	Complete with 600mA driver
65042T/W/C	White	Cool white	4000K	42W	3570lm	80°	230V	⌚	4	Complete with 1200mA driver
65042T/W/W	White	Warm white	3000K	42W	3150lm	80°	230V	⌚	4	Complete with 1200mA driver
65042T/B/C	Black	Cool white	4000K	42W	3570lm	80°	230V	⌚	4	Complete with 1200mA driver
65042T/B/W	Black	Warm white	3000K	42W	3150lm	80°	230V	⌚	4	Complete with 1200mA driver
65510T/W	White	-	-	70W	-	-	230V	⌚	12	Complete with electronic ballast
65510T/B	Black	-	-	70W	-	-	230V	⌚	12	Complete with electronic ballast
65510T/G	Grey	-	-	70W	-	-	230V	⌚	12	Complete with electronic ballast

The Track Floodlight Range

Die cast



65009T | 100W | Halogen | R7s | Die cast




IP20

offer



Suitable for 7610L
LED lamp (Direct 230V).




65010T | 70W | HQI | Rx7s | Die cast



IP20

offer




65010B | 70W | HQI | Rx7s | Ceiling mounted | Die cast



IP20

offer



Order Code	Colour	Watts	Input	Class		Notes
65009T/G	Grey	100W	230V		12	-
65010T/B	Black	70W	230V		12	Complete with electronic ballast
65010T/G	Grey	70W	230V		12	Complete with electronic ballast
65010B/G	Grey	70W	230V		12	Complete with electronic ballast

The Oval Track Spots

Die cast




65112T | 50W | MR16 | GU5,3 | Die cast



IP20

offer




65114T | 50W | R111 | G53 | Die cast



IP20

offer



Order Code	Colour	Watts	Input	Class		Notes
65112T/G	Grey	50W	230V / 12V	⌚	16	Complete with transformer
65114T/G	Grey	50W	230V / 12V	⌚	12	Complete with transformer




65719T/G

The Cone Series Track Spots

Die cast


B-A⁺
65736T | 35W | HQI | G12 | Die cast


IP20
offer

C-A⁺⁺

65719T/B

65719T | 75W | R111 | GU10 | Die cast

IP20
offer


Suitable for R111 LED lamp.



C-A⁺⁺

65719T/G

65719T | 75W | R111 | GU10 | Die cast

IP20
offer


Suitable for R111 LED lamp.



Order Code	Colour	Watts	Input	Beam Angle	Class		Notes
65736T/G	Grey	35W	230V	67°	⊕	12	Complete with electronic ballast
65719T/B	Black	75W	100-240V	-	⊕	12	-
65719T/G	Grey	75W	100-240V	-	⊕	12	-



65835T/G



65835T/B

The Square Head Range

Die cast



B-A+ 65835T/W

65835T | 35W | HQI | G8,5 | Die cast




offer



offer 65835T/B



offer 65835T/G



B-A+ 65834T/W

65834T | 70W | HQI | G8,5 | Die cast




offer



65834T/G

offer



Order Code	Colour	Watts	Input	Beam Angle	Class		Notes
65835T/W	White	35W	230V	53°	⌚	12	Complete with electronic ballast
65835T/B	Black	35W	230V	53°	⌚	12	Complete with electronic ballast
65835T/G	Grey	35W	230V	53°	⌚	12	Complete with electronic ballast
65834T/W	White	70W	230V	53°	⌚	12	Complete with electronic ballast
65834T/G	Grey	70W	230V	53°	⌚	12	Complete with electronic ballast

one



The Egg Shell Range

Die cast




B-A*

65935T | 35W | HQI | G8,5 | Die cast



IP20

offer




B-A*

65934T | 70W | HQI | G8,5 | Die cast



IP20

offer



Order Code	Colour	Watts	Input	Beam Angle	Class		Notes
65935T/G	Grey	35W	230V	53°	⊕	18	Complete with electronic ballast
65934T/G	Grey	70W	230V	53°	⊕	18	Complete with electronic ballast

Box Series Track Spots

Die cast




65012T | 50W | MR16 | GU5,3 | Die cast



IP20

offer



65019T | 50W | MR16 | GU10 | Die cast




IP20

C-A++ 65019T/G



65019T/W



65011T | 75W | PAR30 | E27 | Die cast




IP20

offer

C-A++



Suitable for PAR30 LED lamp.



65016T | 70W | CDM-R | E27 | Die cast



IP20


offer

B-A++ 65016T/G



65016T/B

offer



Order Code	Colour	Watts	Input	Class		Notes
65012T/G	Grey	50W	230V / 12V		20	Complete with transformer
65019T/W	White	50W	100-240V		16	-
65019T/G	Grey	50W	100-240V		16	-
65011T/G	Grey	75W	100-240V		8	-
65016T/B	Black	70W	230V		8	Complete with electronic ballast
65016T/G	Grey	70W	230V		8	Complete with electronic ballast

one


π Series Track Spots

Die cast



A-A⁺⁺ 65008T/G/D/24

65008T | 10W | LED | Die cast




IP20

offer



65008T/G/W/24

offer



B-A⁺

65013T | 70W | CDM-R111 | GX8,5 | Die cast




IP20

offer



offer



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	Box	Notes
65008T/G/D/24	Grey	Daylight	6000K	10W	600lm	24°	230V	⌚	12	Complete with driver
65008T/G/W/24	Grey	Warm white	3000K	10W	600lm	24°	230V	⌚	12	Complete with driver
65013T/G	Grey	-	-	70W	-	-	230V	⌚	8	Complete with electronic ballast



65514T/G



65534T/W

The Side Box Range

Die cast



B-A+


65534T | 70W | HQI | G8,5 | Die cast



IP20



offer



C-A+

65514T | 75W | R111 | GU10 | Die cast




IP20



offer



Suitable for R111 LED lamp.



Order Code	Colour	Watts	Input	Beam Angle	Class		Notes
65534T/W	White	70W	230V	53°	⌚	16	Complete with electronic ballast
65514T/G	Grey	75W	100-240V	-	⌚	12	-



The Side Box Range HQI

Die cast




65235T | 35W | HQI | G8,5 | Die cast



IP20

offer



offer




65234T | 70W | HQI | G8,5 | Die cast



IP20

offer



offer




Order Code	Colour	Watts	Input	Beam Angle	Class		Notes
65235T/W	White	35W	230V	50°	⊕	1	Complete with electronic ballast
65235T/G	Grey	35W	230V	50°	⊕	1	Complete with electronic ballast
65234T/W	White	70W	230V	50°	⊕	1	Complete with electronic ballast
65234T/G	Grey	70W	230V	50°	⊕	1	Complete with electronic ballast

The GU10 Track Spots



Aluminium




65520T | 20W | MR16 | GU10 | Aluminium



65519T | 20W | MR16 | GU10 | Aluminium



65518T | 50W | R111 | GU10 | Aluminium



Order Code	Colour	Watts	Input	Class		Notes
65520T/W	White	20W	100-240V	⌚	20	-
65520T/B	Black	20W	100-240V	⌚	20	-
65519T/W	White	20W	100-240V	⌚	12	-
65519T/B	Black	20W	100-240V	⌚	12	-
65519T/G	Grey	20W	100-240V	⌚	12	-
65518T/W	White	50W	100-240V	⌚	12	-
65518T/B	Black	50W	100-240V	⌚	12	-
65518T/G	Grey	50W	100-240V	⌚	12	-



65105NAT/B



65105NT/B

The Dark Light GU10 Range



A-A++ 65522T/B

65522T | 10W | MR16 | GU10 | Aluminium




DARK
LIGHT
IP20



65522T/W



Removable
honeycomb.



A-A++ 65105NT/B

65105NT | 10W | MR16 | GU10 | Aluminium




DARK
LIGHT
IP20



65105NT/W



Suitable for GU10
LED lamp.



A-A++ 65105NAT/B

65105NAT | 10W | MR16 | GU10 | Aluminium




new
DARK
LIGHT
IP20



65105NAT/W



Suitable for GU10
LED lamp.



Order Code	Colour	Reflector	Watts	Input	Class		Notes
65522T/W	White	-	10W	100-240V	⌚	24	-
65522T/B	Black	-	10W	100-240V	⌚	24	-
65105NT/W	White	Black	10W	100-240V	⌚	24	-
65105NT/B	Black	Brass	10W	100-240V	⌚	24	-
65105NAT/W	White	Black	10W	100-240V	⌚	24	-
65105NAT/B	Black	Brass	10W	100-240V	⌚	24	-



C-A++ 65111AT/W


65111AT | 75W | PAR30 | E27 | Die cast



IP20



Suitable for PAR30 LED lamp.



C-A++ 65111AT/B


65111AT | 75W | PAR30 | E27 | Die cast



IP20



Suitable for PAR30 LED lamp.



C-A++ 65111AT/G


65111AT | 75W | PAR30 | E27 | Die cast



IP20



Suitable for PAR30 LED lamp.



Order Code	Colour	Watts	Input	Class		Notes
65111AT/W	White	75W	100-240V	⌚	40	-
65111AT/B	Black	75W	100-240V	⌚	40	-
65111AT/G	Grey	75W	100-240V	⌚	40	-



The E27 Track Spot

Die cast



C-A⁺⁺ 6511AT/W


65118AT | 50W | R111 | GU10 | Die cast



IP20



Suitable for R111 LED lamp.



C-A⁺⁺ 65118AT/B


65118AT | 50W | R111 | GU10 | Die cast



IP20



Suitable for R111 LED lamp.



C-A⁺⁺ 65118AT/G


65118AT | 50W | R111 | GU10 | Die cast



IP20



Suitable for R111 LED lamp.



Order Code	Colour	Watts	Input	Class		Notes
65118AT/W	White	50W	100-240V	⌚	40	-
65118AT/B	Black	50W	100-240V	⌚	40	-
65118AT/G	Grey	50W	100-240V	⌚	40	-