

08

Downlights Adjustable LED

Pages 205-222

COB LED | SMD LED | LED


Die cast | Natural aluminium | Trimless






COB Trimless LED

Aluminium

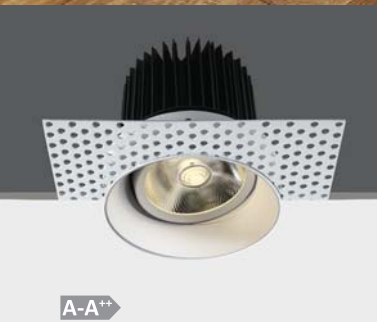

A-A++


11130BT | 30W | COB LED | Trimless | Aluminium




IP20



110mm



150x150mm



125mm



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⏻	⚡	⬆️	📦	Notes
11130BT/W/C	White	Cool white	4000K	30W	2200lm	38°	700mA	III	40cm	110mm	160mm	12	Requires 700mA driver
11130BT/W/W	White	Warm white	3000K	30W	2200lm	38°	700mA	III	40cm	110mm	160mm	12	Requires 700mA driver

one

Adjustable Multi LED

Aluminium



11106LB | 6x1W | LED | Aluminium



A-A++



11109L | 9x1W | LED | Natural aluminium



A-A++



11112L | 12x1W | LED | Natural aluminium



A-A++



11118L | 18x1W | LED | Natural aluminium



A-A++



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⚡	🔧	📏	📦	Notes
11106LB/D/35	Black	Daylight	6000K	6x1W	360lm	35°	350mA	III	40cm	90mm	50mm	50	Requires 350mA driver
11106LB/W/35	Black	Warm white	3000K	6x1W	270lm	35°	350mA	III	40cm	90mm	50mm	50	Requires 350mA driver
11109L/D/35	Aluminium	Daylight	6000K	9x1W	540lm	35°	350mA	III	40cm	110mm	80mm	30	Requires 350mA driver
11109L/W/35	Aluminium	Warm white	3000K	9x1W	405lm	35°	350mA	III	40cm	110mm	80mm	30	Requires 350mA driver
11112L/D/15	Aluminium	Daylight	6000K	12x1W	720lm	15°	350mA	III	40cm	140mm	80mm	30	Requires 350mA driver
11112L/D/35	Aluminium	Daylight	6000K	12x1W	720lm	35°	350mA	III	40cm	140mm	80mm	30	Requires 350mA driver
11112L/W/15	Aluminium	Warm white	3000K	12x1W	540lm	15°	350mA	III	40cm	140mm	80mm	30	Requires 350mA driver
11112L/W/35	Aluminium	Warm white	3000K	12x1W	540lm	35°	350mA	III	40cm	140mm	80mm	30	Requires 350mA driver
11118L/D/35	Aluminium	Daylight	6000K	18x1W	1080lm	35°	350mA	III	40cm	155mm	90mm	30	Requires 350mA driver
11118L/W/35	Aluminium	Warm white	3000K	18x1W	810lm	35°	350mA	III	40cm	155mm	90mm	30	Requires 350mA driver


The COB Shop Range

Die cast



A-A+ 11138/W/W


11138 | 38W | COB LED | Die cast



IP20




11138/G/C



A-A+ 51125/G/C

51125 | 25W | COB LED | Die cast




IP20



A-A+ 51138/W/C

51138 | 38W | COB LED | Die cast



IP20



51138/G/C




Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⚡/⚡	⏏	📦	Notes
11138/W/C	White	Cool white	4000K	38W	2450lm	38°	100-240V	□	150mm	160mm	12	Complete with 900mA driver
11138/W/W	White	Warm white	3000K	38W	2450lm	38°	100-240V	□	150mm	160mm	12	Complete with 900mA driver
11138/G/C	Grey	Cool white	4000K	38W	2450lm	38°	100-240V	□	150mm	160mm	12	Complete with 900mA driver
51125/G/C	Grey	Cool white	4000K	25W	1750lm	38°	100-240V	□	130x130mm	160mm	12	Complete with 600mA driver
51138/W/C	White	Cool white	4000K	38W	2450lm	38°	100-240V	□	170x170mm	200mm	8	Complete with 900mA driver
51138/G/C	Grey	Cool white	4000K	38W	2450lm	38°	100-240V	□	170x170mm	200mm	8	Complete with 900mA driver

The COB Box Type Shop Range



A-A++ 51120/W/W


51120 | 20W | COB LED | Aluminium



IP20




51120/G/W



A-A++ 51220/W/C


51220 | 2x20W | COB LED | Aluminium



IP20




51220/G/C



A-A++

51130 | 30W | COB LED | Aluminium + metal




new

IP20




A-A++

51230 | 2x30W | COB LED | Aluminium + metal



new

IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
51120/W/W	White	Warm white	3000K	20W	1400lm	36°	230V		165x165mm	140mm	12	Complete with 500mA driver
51120/G/C	Grey	Cool white	4000K	20W	1400lm	36°	230V		165x165mm	140mm	12	Complete with 500mA driver
51120/G/W	Grey	Warm white	3000K	20W	1400lm	36°	230V		165x165mm	140mm	12	Complete with 500mA driver
51220/W/C	White	Cool white	4000K	2x20W	2x1400lm	36°	230V		330x165mm	140mm	8	Complete with 500mA drivers
51220/G/C	Grey	Cool white	4000K	2x20W	2x1400lm	36°	230V		330x165mm	140mm	8	Complete with 500mA drivers
51220/G/W	Grey	Warm white	3000K	2x20W	2x1400lm	36°	230V		330x165mm	140mm	8	Complete with 500mA drivers
51130/B/C	Black	Cool white	4000K	30W	2700lm	38°	230V		160x160mm	125mm	12	Complete with 750mA driver
51130/B/W	Black	Warm white	3000K	30W	2600lm	38°	230V		160x160mm	125mm	12	Complete with 750mA driver
51230/B/C	Black	Cool white	4000K	2x30W	2x2700lm	38°	230V		320x160mm	125mm	6	Complete with 750mA drivers
51230/B/W	Black	Warm white	3000K	2x30W	2x2600lm	38°	230V		320x160mm	125mm	6	Complete with 750mA drivers



11150A/W/C

11125B/W/C


51125A/W/W

The COB Shop Downlights Pro

Die cast




A-A++

11150A | 50W | COB LED | Die cast


IP20




A-A++

51125A | 25W | COB LED | Die cast


IP20



A-A++

11125B | 25W | COB LED | Die cast


IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⚡	↕	📦	Notes
11150A/W/C	White	Cool white	4000K	50W	4450lm	40°	100-240V	□	165mm	160mm	8	Complete with 1200mA driver
11150A/W/W	White	Warm white	3000K	50W	3950lm	40°	100-240V	□	165mm	160mm	8	Complete with 1200mA driver
51125A/W/W	White	Warm white	3000K	25W	2300lm	40°	100-240V	□	165x165mm	130mm	8	Complete with 700mA driver
11125B/W/C	White	Cool white	4000K	25W	2450lm	35°	100-240V	□	190mm	120mm	8	Complete with 700mA driver




The COB Round Downlights


Die cast




11120B | 20W | COB LED | Die cast



11140B | 40W | COB LED | Die cast



11150B | 50W | COB LED | Die cast



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
11120B/W/C	White	Cool white	4000K	20W	1600lm	36°	230V		120mm	125mm	18	Complete with 700mA driver
11120B/W/W	White	Warm white	3000K	20W	1500lm	36°	230V		120mm	125mm	18	Complete with 700mA driver
11140B/W/C	White	Cool white	4000K	40W	3300lm	36°	230V		180mm	165mm	8	Complete with 1000mA driver
11150B/W/C	White	Cool white	4000K	50W	3850lm	40°	230V		120mm	250mm	12	Complete with 1200mA driver
11150B/W/W	White	Warm white	3000K	50W	3750lm	40°	230V		120mm	250mm	12	Complete with 1200mA driver




The COB Square Downlights

Die cast



A-A++

51109B | 10W | COB LED | Die cast




IP20




A-A++

51120B | 20W | COB LED | Die cast




IP20



A-A++

51140B | 40W | COB LED | Die cast



IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
51109B/W/W	White	Warm white	3000K	10W	700lm	36°	230V		90x90mm	120mm	27	Complete with 200mA driver
51120B/W/C	White	Cool white	4000K	20W	1600lm	36°	230V		125x125mm	160mm	12	Complete with 500mA driver
51120B/W/W	White	Warm white	3000K	20W	1500lm	36°	230V		125x125mm	160mm	12	Complete with 500mA driver
51140B/W/C	White	Cool white	4000K	40W	3300lm	36°	230V		170x170mm	160mm	8	Complete with 1000mA driver
51140B/W/W	White	Warm white	3000K	40W	3200lm	36°	230V		170x170mm	160mm	8	Complete with 1000mA driver


The COB Square Downlights

Die cast



A-A++

51209B | 2x10W | COB LED | Die cast




IP20



A-A++

51240B | 2x40W | COB LED | Die cast



IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
51209B/W/W	White	Warm white	3000K	2x10W	2x700lm	36°	230V		180x90mm	130mm	18	Complete with 200mA drivers
51240B/W/W	White	Warm white	3000K	2x40W	2x3200lm	36°	230V		320x165mm	170mm	4	Complete with 1000mA drivers



The COB Semi Trimless Range



A-A⁺⁺

11112TR | 12W | COB LED | Aluminium | Semi trimless










A-A⁺⁺ 11118TR/W/C

11118TR | 18W | COB LED | Aluminium | Semi trimless









A-A⁺⁺

11140TR | 40W | COB LED | Die cast








Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
11112TR/W/W	White	Warm white	3000K	12W	890lm	35°	100-240V		105mm	110mm	20	Complete with 300mA driver
11118TR/W/C	White	Cool white	4000K	18W	1300lm	35°	100-240V		135mm	200mm	12	Complete with 450mA driver
11118TR/G/C	Grey	Cool white	4000K	18W	1300lm	35°	100-240V		135mm	200mm	20	Complete with 450mA driver
11118TR/G/W	Grey	Warm white	3000K	18W	1120lm	35°	100-240V		135mm	200mm	20	Complete with 450mA driver
11140TR/W/W	White	Warm white	3000K	40W	3200lm	36°	230V		165mm	170mm	8	Complete with 1000mA driver


The COB Semi Trimless Square




51115TR | 15W | COB LED | Die cast



IP20

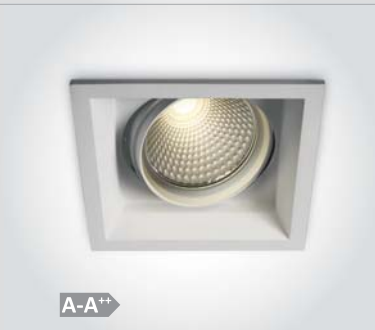


51120TR | 20W | COB LED | Die cast



IP20



51140TR | 40W | COB LED | Die cast



IP20



51220TR | 2x20W | COB LED | Die cast



IP20




Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
51115TR/W/W	White	Warm white	3000K	15W	1000lm	36°	230V		95x95mm	120mm	27	Complete with 500mA driver
51120TR/W/W	White	Warm white	3000K	20W	1500lm	36°	230V		120x120mm	150mm	12	Complete with 700mA driver
51140TR/W/W	White	Warm white	3000K	40W	3200lm	36°	230V		160x160mm	180mm	8	Complete with 1000mA driver
51220TR/W/W	White	Warm white	3000K	2x20W	2x1500lm	36°	230V		230x120mm	150mm	6	Complete with 700mA drivers

The COB Retro Downlights


Aluminium




11115C | 15W | COB LED | Aluminium




IP20




11120C | 20W | COB LED | Aluminium




IP20



11130C | 30W | COB LED | Aluminium



IP20




Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⌀	Height	Box	Notes
11115C/W/C	White	Cool white	4000K	15W	1200lm	38°	230V	□	95mm	100mm	30	Complete with 350mA driver
11120C/W/C	White	Cool white	4000K	20W	1600lm	38°	230V	□	125mm	100mm	30	Complete with 500mA driver
11120C/W/W	White	Warm white	3000K	20W	1500lm	38°	230V	□	125mm	100mm	30	Complete with 500mA driver
11130C/W/C	White	Cool white	4000K	30W	2200lm	38°	230V	□	145mm	110mm	18	Complete with 700mA driver
11130C/W/W	White	Warm white	3000K	30W	2100lm	38°	230V	□	145mm	110mm	18	Complete with 700mA driver

The Shop Classic Rectangle


Die cast




51140 | 40W | COB LED | Aluminium




new
IP20



51145 | 45W | SMD LED | Die cast



IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
51140/B/C	Black	Cool white	4000K	40W	3500lm	70°	230V			220x130mm	140mm	9 Complete with 1050mA driver
51140/B/W	Black	Warm white	3000K	40W	3400lm	70°	230V			220x130mm	140mm	9 Complete with 1050mA driver
51145/W/C	White	Cool white	4000K	45W	3500lm	95°	230V			210x130mm	150mm	4 Complete with 1200mA driver
51145/W/W	White	Warm white	3000K	45W	3500lm	95°	230V			210x130mm	150mm	4 Complete with 1200mA driver



11115E/W/W


The COB Pop Up Range

Die cast



A-A+

11115E | 15W | COB LED | Die cast



IP20




Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⏏	⚡	⬆️⬆️	📦	Notes
11115E/W/W	White	Warm white	3000K	15W	1114lm	38°	350mA	⚡	30cm	135mm	65mm	25	Requires 350mA driver

The COB Pop Out Range


Aluminium

A-A⁺⁺


11107R | 7W | COB LED | Aluminium




IP20

A-A⁺⁺


11114R | 14W | COB LED | Aluminium




IP20

A-A⁺⁺

11125R | 25W | COB LED | Aluminium



IP20




Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11107R/W/C	White	Cool white	4000K	7W	600lm	38°	350mA		40cm	100mm	70mm	12	Requires 350mA driver
11114R/W/C	White	Cool white	4000K	14W	1100lm	36°	700mA		40cm	130mm	85mm	12	Requires 700mA driver
11114R/W/W	White	Warm white	3000K	14W	1037lm	36°	700mA		40cm	130mm	85mm	12	Requires 700mA driver
11125R/W/C	White	Cool white	4000K	25W	2200lm	40°	700mA		40cm	160mm	85mm	8	Requires 700mA driver
11125R/W/W	White	Warm white	3000K	25W	2070lm	40°	700mA		40cm	160mm	85mm	8	Requires 700mA driver

The COB Extractable Range



A-A++ 11118H/W/C

11118H | 18W | COB LED | Aluminium



IP20




11118H/G/C



A-A++

11115F | 15W | COB LED | Die cast



IP20



A-A++

11125F | 25W | COB LED | Die cast



IP20




Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
11118H/W/C	White	Cool white	4000K	18W	1300lm	35°	100-240V		120mm	110mm	20	Complete with 500mA driver
11118H/G/C	Grey	Cool white	4000K	18W	1300lm	35°	100-240V		120mm	110mm	20	Complete with 500mA driver
11118H/G/W	Grey	Warm white	3000K	18W	1120lm	35°	100-240V		120mm	110mm	20	Complete with 500mA driver
11115F/W/C	White	Cool white	4000K	15W	1100lm	60°	230V		145mm	155mm	18	Complete with 350mA driver
11125F/W/C	White	Cool white	4000K	25W	1900lm	60°	230V		172mm	170mm	12	Complete with 650mA driver



The COB Extractable Range


11110F | 10W | COB LED | Die cast



A-A++

IP20


11112F | 12W | COB LED | Die cast



A-A++

IP20

11120F | 20W | COB LED | Die cast



A-A++

IP20

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⏻	⚡	⏏	📦	Notes
11110F/W/C	White	Cool white	4000K	10W	800lm	36°	230V	□	-	90mm	105mm	36	Complete with 200mA driver
11110F/W/W	White	Warm white	3000K	10W	770lm	36°	230V	□	-	90mm	105mm	36	Complete with 200mA driver
11112F/W/C	White	Cool white	4000K	12W	1100lm	50°	700mA	◇	40cm	102mm	120mm	36	Requires 700mA driver
11112F/W/W	White	Warm white	3000K	12W	1100lm	50°	700mA	◇	40cm	102mm	120mm	36	Requires 700mA driver
11120F/W/W	White	Warm white	3000K	20W	1500lm	36°	230V	□	-	125mm	130mm	18	Complete with 500mA driver


The COB Recessed Range

Die cast




11135L | 35W | COB LED | Die cast

Matching design with 65624T.





11130B | 30W | COB LED | Die cast



15° Reflector for 11130B.
Order code 0736/15.



11140L | 40W | COB LED | Die cast





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
11135L/W/C	White	Cool white	4000K	35W	3050lm	45°	230V	⊕	145mm	110mm	18	Complete with 900mA driver
11130B/W/W	White	Warm white	3000K	30W	2200lm	36°	230V	⊕	100mm	70mm	9	Complete with 700mA driver
11140L/W/C	White	Cool white	4000K	40W	3200lm	36°	230V	⊕	100mm	70mm	12	Complete with 1000mA driver
11140L/W/W	White	Warm white	3000K	40W	3100lm	36°	230V	⊕	100mm	70mm	12	Complete with 1000mA driver





The COB Pop Out Range



11115RA | 15W | COB LED | Die cast



11125RA | 25W | COB LED | Die cast



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	Light	Mount	Box	Notes
11115RA/W/C	White	Cool white	4000K	15W	1100lm	36°	230V	□	90mm	70mm	24	Complete with 500mA driver
11125RA/W/C	White	Cool white	4000K	25W	1900lm	36°	230V	□	120mm	80mm	12	Complete with 700mA driver
11125RA/W/W	White	Warm white	3000K	25W	1800lm	36°	230V	□	120mm	80mm	12	Complete with 700mA driver