

02

Recessed Spots Fixed LED

Pages 39-68

COB LED | SMD LED

Die cast | Aluminium | Plastic | Gypsum | Acrylic | Trimless





 IP20 IP44 IP54 IP65


 DIMMABLE
 
 DARK LIGHT
 
 QUICK FIX
 
 FIRE RATED
 
 CE
 80 CRI 85 CRI 90 CRI
 
 2 YEAR
 
 3 YEAR













The Super Mini Series

	10101L 1W LED Aluminium							Driver can not pass through the cutout hole.						
A-A++ 10101L/W/W														
	10101L 1W LED Aluminium							Driver can not pass through the cutout hole.						
A-A++ 10101L/B/W														
	10101D 1W LED Die cast							Driver can not pass through the cutout hole.						
A-A++ 10101D/W/W														
	10101D 1W LED Die cast							Driver can not pass through the cutout hole.						
A-A++ 10101D/B/W														
Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class					Notes		
10101L/W/W	White	Warm white	3000K	1W	70lm	350mA		100cm	12mm	30mm	100	Requires 350mA driver		
10101L/W/BL	White	Blue	-	1W	-	350mA		100cm	12mm	30mm	100	Requires 350mA driver		
10101L/B/W	Black	Warm white	3000K	1W	70lm	350mA		100cm	12mm	30mm	100	Requires 350mA driver		
10101D/W/W	White	Warm white	3000K	1W	60lm	350mA		40cm	20mm	45mm	100	Requires 350mA driver		
10101D/B/W	Black	Warm white	3000K	1W	60lm	350mA		40cm	20mm	45mm	100	Requires 350mA driver		



The 1W/3W LED Spots



Aluminium



A-A++ 10103B/W/W

10103B | 1W/3W | COB LED | Aluminium


1W@350mA / 3W@700mA

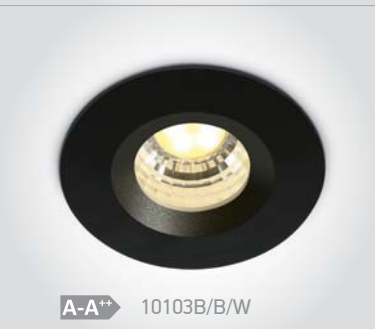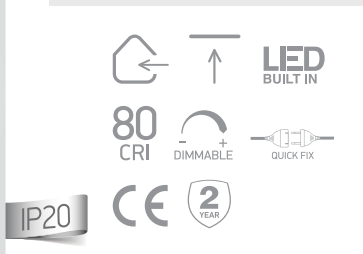

A-A++ 10103B/B/W

10103B | 1W/3W | COB LED | Aluminium


1W@350mA / 3W@700mA

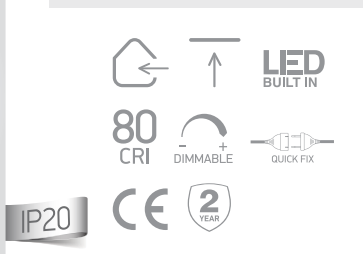

A-A++ 10103B/AL/W

10103B | 1W/3W | COB LED | Aluminium




1W@350mA / 3W@700mA

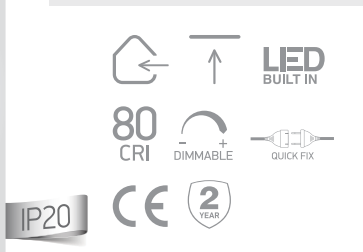

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⏏	⚡	⏏	📦	Notes
10103B/W/W	White	Warm white	3000K	1W/3W	200lm@3W	40°	350mA/700mA	III	40cm	35mm	50mm	100	Requires 350mA/700mA driver
10103B/B/W	Black	Warm white	3000K	1W/3W	200lm@3W	40°	350mA/700mA	III	40cm	35mm	50mm	100	Requires 350mA/700mA driver
10103B/AL/W	Aluminium	Warm white	3000K	1W/3W	200lm@3W	40°	350mA/700mA	III	40cm	35mm	50mm	100	Requires 350mA/700mA driver





The 1W/3W LED Dark Light Range

 A-A++	10103R 1W/3W COB LED Aluminium							1W@350mA / 3W@700mA											
 DARK LIGHT		 80 CRI		 DIMMABLE		 QUICK FIX		 LED BUILT IN				 60mm		 52mm		 40°			
 IP20		 CE		 2 YEAR															
 A-A++	10103D 1W/3W COB LED Aluminium							1W@350mA / 3W@700mA											
 DARK LIGHT		 80 CRI		 DIMMABLE		 QUICK FIX		 LED BUILT IN				 50mm		 53mm		 40°			
 IP20		 CE		 2 YEAR															
 A-A++ 10103DE/W/W	10103DE 1W/3W COB LED Aluminium							1W@350mA / 3W@700mA											
 new		 DARK LIGHT		 80 CRI		 DIMMABLE		 QUICK FIX		 LED BUILT IN				 45mm		 40mm		 38°	
 IP20		 CE		 2 YEAR															
 A-A++ 10103DE/B/W	10103DE 1W/3W COB LED Aluminium							1W@350mA / 3W@700mA											
 new		 DARK LIGHT		 80 CRI		 DIMMABLE		 QUICK FIX		 LED BUILT IN				 45mm		 40mm		 38°	
 IP20		 CE		 2 YEAR															
Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes						
10103R/W/W	White	Warm white	3000K	1W/3W	200lm@3W	40°	350mA/700mA		40cm	50mm	65mm	50	Requires 350mA/700mA driver						
10103D/W/W	White	Warm white	3000K	1W/3W	200lm@3W	40°	350mA/700mA		40cm	43mm	65mm	100	Requires 350mA/700mA driver						
10103DE/W/W	White	Warm white	3000K	1W/3W	200lm@3W	38°	350mA/700mA		40cm	38mm	60mm	50	Requires 350mA/700mA driver						
10103DE/B/W	Black	Warm white	3000K	1W/3W	200lm@3W	38°	350mA/700mA		40cm	38mm	60mm	50	Requires 350mA/700mA driver						




The 1W/3W LED Dark Light Range

 A-A++ 10103DL/W/B/W	10103DL 1W/3W COB LED Aluminium										1W@350mA / 3W@700mA				
    80 CRI  DIMMABLE  CE  2 YEAR	 LED BUILT IN  QUICK FIX		 48mm	 50mm	 36°										
 A-A++ 10103DL/W/BS/W	10103DL 1W/3W COB LED Aluminium										1W@350mA / 3W@700mA				
    80 CRI  DIMMABLE  CE  2 YEAR	 LED BUILT IN  QUICK FIX		 48mm	 50mm	 36°										
 A-A++ 10103DL/B/B/W	10103DL 1W/3W COB LED Aluminium										1W@350mA / 3W@700mA				
    80 CRI  DIMMABLE  CE  2 YEAR	 LED BUILT IN  QUICK FIX		 48mm	 50mm	 36°										
 A-A++ 10103DL/B/BS/W	10103DL 1W/3W COB LED Aluminium										1W@350mA / 3W@700mA				
    80 CRI  DIMMABLE  CE  2 YEAR	 LED BUILT IN  QUICK FIX		 48mm	 50mm	 36°										
Order Code	Colour	Reflector	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes	
10103DL/W/B/W	White	Black	Warm white	3000K	1W/3W	200@3W	36°	350mA/700mA		40cm	40mm	70mm	50	Requires 350mA/700mA driver	
10103DL/W/BS/W	White	Brass	Warm white	3000K	1W/3W	200@3W	36°	350mA/700mA		40cm	40mm	70mm	50	Requires 350mA/700mA driver	
10103DL/B/B/W	Black	Black	Warm white	3000K	1W/3W	200@3W	36°	350mA/700mA		40cm	40mm	70mm	50	Requires 350mA/700mA driver	
10103DL/B/BS/W	Black	Brass	Warm white	3000K	1W/3W	200@3W	36°	350mA/700mA		40cm	40mm	70mm	50	Requires 350mA/700mA driver	


Fixed Spots




10103L | 3x1W | LED | Natural aluminium




50103L | 3x1W | LED | Natural aluminium



50401L | 4x1W | LED | Natural aluminium



50601L | 6x1W | LED | Natural aluminium





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⏻	⚡/⚡	⬆/⬆	📦	Notes
10103L/D/35	Aluminium	Daylight	6000K	3x1W	180lm	35°	350mA	III	40cm	60mm	40mm	100	Requires 350mA driver
10103L/W/35	Aluminium	Warm white	3000K	3x1W	135lm	35°	350mA	III	40cm	60mm	40mm	100	Requires 350mA driver
50103L/D/35	Aluminium	Daylight	6000K	3x1W	180lm	35°	350mA	III	40cm	60mm	40mm	100	Requires 350mA driver
50103L/W/35	Aluminium	Warm white	3000K	3x1W	135lm	35°	350mA	III	40cm	60mm	40mm	100	Requires 350mA driver
50401L/D/35	Aluminium	Daylight	6000K	4x1W	240lm	35°	350mA	III	40cm	80x80mm	40mm	50	Requires 350mA driver
50401L/W/35	Aluminium	Warm white	3000K	4x1W	180lm	35°	350mA	III	40cm	80x80mm	40mm	50	Requires 350mA driver
50601L/D/35	Aluminium	Daylight	6000K	6x1W	360lm	35°	350mA	III	40cm	118x80mm	40mm	50	Requires 350mA driver
50601L/W/35	Aluminium	Warm white	3000K	6x1W	270lm	35°	350mA	III	40cm	118x80mm	40mm	50	Requires 350mA driver

3W LED-Glass Lens Aluminium





A-A++ 10103N/W/W/35

10103N | 3x1W | LED | Aluminium





A-A++ 10103N/B/W/35

10103N | 3x1W | LED | Aluminium



A-A++ 10103N/AL/W/35

10103N | 3x1W | LED | Aluminium



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⏻	⚡	⬆️	📦	Notes
10103N/W/D/35	White	Daylight	6000K	3x1W	180lm	35°	350mA	III	40cm	60mm	45mm	100	Requires 350mA driver
10103N/W/W/35	White	Warm white	3000K	3x1W	135lm	35°	350mA	III	40cm	60mm	45mm	100	Requires 350mA driver
10103N/B/D/35	Black	Daylight	6000K	3x1W	180lm	35°	350mA	III	40cm	60mm	45mm	100	Requires 350mA driver
10103N/B/W/35	Black	Warm white	3000K	3x1W	135lm	35°	350mA	III	40cm	60mm	45mm	100	Requires 350mA driver
10103N/AL/D/35	Aluminium	Daylight	6000K	3x1W	180lm	35°	350mA	III	40cm	60mm	45mm	100	Requires 350mA driver
10103N/AL/W/35	Aluminium	Warm white	3000K	3x1W	135lm	35°	350mA	III	40cm	60mm	45mm	100	Requires 350mA driver

The Retro Dark Light Range



A-A++ 10107Z/W/W


10107Z | 7W | COB LED | Die cast + plastic



10107Z/B/W



Complete with Black & Brass reflectors.



A-A++ 10112Z/W/W


10112Z | 12W | COB LED | Die cast + plastic



10112Z/B/W



Complete with Black & Brass reflectors.



A-A++ 10120Z/W/W


10120Z | 20W | COB LED | Die cast + plastic



10120Z/B/W



Complete with Black & Brass reflectors.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⌀	H	Box	Notes
10107Z/W/W	White	Warm white	3000K	7W	560lm	45°	230V	□	65mm	80mm	40	Complete with 160mA driver
10107Z/B/W	Black	Warm white	3000K	7W	560lm	45°	230V	□	65mm	80mm	40	Complete with 160mA driver
10112Z/W/W	White	Warm white	3000K	12W	960lm	45°	230V	□	82mm	88mm	30	Complete with 300mA driver
10112Z/B/W	Black	Warm white	3000K	12W	960lm	45°	230V	□	82mm	88mm	30	Complete with 300mA driver
10120Z/W/W	White	Warm white	3000K	20W	1600lm	45°	230V	□	105mm	105mm	20	Complete with 500mA driver
10120Z/B/W	Black	Warm white	3000K	20W	1600lm	45°	230V	□	105mm	105mm	20	Complete with 500mA driver



10107K/W/W + 050104/CU

10112L/W/W + 10112LR/B

10112L/B/W + 10112LR/BS

The COB Dark Light Range

Interchangeable Reflector



A-A++ 10107K/W/W + 050104/B

10107K | 7W | COB LED | Aluminium

Ring must be ordered separately.



10107K/B/W + 050104/BS



050104/W White



050104/B Black



050104/C Chrome



050104/BS Brass



050104/CU Copper




A-A++ 10112L/W/W+10112LR/BS

10112L | 12W | COB LED | Aluminium

Reflector must be ordered separately.



10112L/B/W+10112LR/W



10112LR/W White



10112LR/B Black



10112LR/G Matt chrome



10112LR/C Chrome






10112LR/BS Brass



10112LR/CU Copper

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⚡	🔧	📏	📦	Notes
10107K/W/W	White	Warm white	3000K	7W	550lm	35°	700mA	III	40cm	76mm	100mm	30	Requires 700mA driver
10107K/B/W	Black	Warm white	3000K	7W	550lm	35°	700mA	III	40cm	76mm	100mm	30	Requires 700mA driver
10112L/W/W	White	Warm white	3000K	12W	1100lm	40°	700mA	III	40cm	75mm	100mm	50	Requires 700mA driver
10112L/B/W	Black	Warm white	3000K	12W	1100lm	40°	700mA	III	40cm	75mm	100mm	50	Requires 700mA driver



The 7W Dark Light Range

 A-A++	10107D 7W COB LED Die cast  DARK LIGHT  IP20  90 CRI  DIMMABLE  LED BUILT IN  QUICK FIX  CE  3 YEAR   83mm  60mm  36°												
 A-A++	10107DA 7W COB LED Die cast  DARK LIGHT  IP20  90 CRI  DIMMABLE  LED BUILT IN  QUICK FIX  CE  3 YEAR   103mm  88mm  36°												
 A-A++ 10107DC/W/W	10107DC 7W COB LED Die cast  DARK LIGHT  IP20  80 CRI  CE  2 YEAR  LED BUILT IN   67mm  83mm  50°												
 A-A++ 10107DC/B/W	10107DC 7W COB LED Die cast  DARK LIGHT  IP20  80 CRI  CE  2 YEAR  LED BUILT IN   67mm  83mm  50°												
Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10107D/W/W	White	Warm white	3000K	7W	530lm	36°	700mA		40cm	77mm	90mm	60	Requires 700mA driver
10107DA/W/W	White	Warm white	3000K	7W	530lm	36°	700mA		40cm	97mm	120mm	30	Requires 700mA driver
10107DC/W/W	White	Warm white	3000K	7W	560lm	50°	230V		15cm	55mm	110mm	50	Complete with 300mA driver
10107DC/B/W	Black	Warm white	3000K	7W	560lm	50°	230V		15cm	55mm	110mm	50	Complete with 300mA driver





The 12W Dark Light Range

10112E | 12W | COB LED | Die cast





A-A++

10112C | 12W | COB LED | Die cast





A-A++

10112TD | 12W | COB LED | Die cast



A-A++ 10112TD/W/W

10112TD | 12W | COB LED | Die cast



A-A++ 10112TD/B/W

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⏻ S	💡	⬆️	📦	Notes
10112E/W/C	White	Cool white	4000K	12W	1100lm	40°	700mA	⚡	40cm	75mm	110mm	50	Requires 700mA driver
10112E/W/W	White	Warm white	3000K	12W	1100lm	40°	700mA	⚡	40cm	75mm	110mm	50	Requires 700mA driver
10112C/W/W	White	Warm white	3000K	12W	1100lm	40°	700mA	⚡	40cm	75mm	135mm	50	Requires 700mA driver
10112TD/W/C	White	Cool white	4000K	12W	960lm	20°	230V	🔌	-	82mm	100mm	50	Complete with 300mA driver
10112TD/W/W	White	Warm white	3000K	12W	960lm	20°	230V	🔌	-	82mm	100mm	50	Complete with 300mA driver
10112TD/B/C	Black	Cool white	4000K	12W	960lm	20°	230V	🔌	-	82mm	100mm	50	Complete with 300mA driver
10112TD/B/W	Black	Warm white	3000K	12W	960lm	20°	230V	🔌	-	82mm	100mm	50	Complete with 300mA driver



10105FD/W/W

10110FD/B/W

10115FD/W/W

The Dark Light Pro Range

Aluminium

	10105FD 5W COB LED Aluminium											
A-A++ 10105FD/W/W								55mm		95mm		24°
	10110FD 10W COB LED Aluminium											
A-A++ 10110FD/W/W								75mm		100mm		24°
	10115FD 15W COB LED Aluminium											
A-A++ 10115FD/W/W								92mm		120mm		24°
Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10105FD/W/W	White	Warm white	3000K	5W	300lm	24°	230V		50mm	120mm	50	Complete with 300mA driver
10110FD/W/W	White	Warm white	3000K	10W	800lm	24°	230V		68mm	130mm	50	Complete with 300mA driver
10115FD/W/W	White	Warm white	3000K	15W	1275lm	24°	230V		80mm	150mm	20	Complete with 350mA driver

The Dark Light Pro Range

Aluminium




A-A++ 10105FD/B/W

10105FD | 5W | COB LED | Aluminium




A-A++ 10110FD/B/W

10110FD | 10W | COB LED | Aluminium



A-A++ 10115FD/B/W

10115FD | 15W | COB LED | Aluminium



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⌀	Height	Box	Notes
10105FD/B/W	Black	Warm white	3000K	5W	300lm	24°	230V	□	50mm	120mm	50	Complete with 300mA driver
10110FD/B/W	Black	Warm white	3000K	10W	800lm	24°	230V	□	68mm	130mm	50	Complete with 300mA driver
10115FD/B/W	Black	Warm white	3000K	15W	1275lm	24°	230V	□	80mm	150mm	20	Complete with 350mA driver

The Dark Light Range

 A-A++	10112H 12W COB LED Aluminium     100mm89mm40°												
 A-A++	10112R 12W COB LED Aluminium     85mm70mm50° Ring must be ordered separately.												
 050162/W White	 050162/B Black	 050162/AL Aluminium	 050162/DC Dark chrome	 050162/GL Gold									
Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10112H/W/W	White	Warm white	3000K	12W	850lm	40°	700mA		40cm	87mm	100mm	50	Requires 700mA driver
10112H/W/EW	White	Extra warm white	2700K	12W	850lm	40°	700mA		40cm	87mm	100mm	50	Requires 700mA driver
10112R/B/W	Black	Warm white	3000K	12W	1100lm	50°	700mA		40cm	68mm	90mm	50	Requires 700mA driver




10105W/AL/W

10107W/AL/W

The COB Bathroom IP44 Range

Aluminium

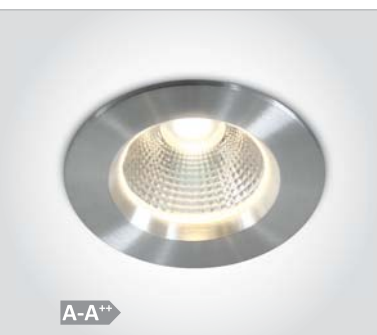


A-A

10105W | 5W | COB LED | Aluminium



IP44



A-A

10107W | 7W | COB LED | Aluminium





IP44



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10105W/AL/W	Aluminium	Warm white	3000K	5W	425lm	30°	230V		57mm	90mm	30	Complete with 500mA driver
10107W/AL/W	Aluminium	Warm white	3000K	7W	507lm	30°	100-240V		68mm	95mm	30	Complete with 700mA driver



The COB Dark Light IP44 Range

 A-A+	10107DL 7W COB LED Aluminium    53mm90mm38°												
 A-A+ 10107WP/W/W	10107WP 7W COB LED Die cast   10107WP/B/W  67mm80mm38°												
 A-A+ 10112TP/W/W	10112TP 12W COB LED Die cast   10112TP/B/W  82mm100mm38°												
Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10107DL/W/W	White	Warm white	3000K	7W	450lm	38°	700mA		40cm	42mm	100mm	50	Requires 700mA driver
10107WP/W/W	White	Warm white	3000K	7W	500lm	38°	700mA		40cm	56mm	100mm	50	Requires 700mA driver
10107WP/B/W	Black	Warm white	3000K	7W	500lm	38°	700mA		40cm	56mm	100mm	50	Requires 700mA driver
10112TP/W/C	White	Cool white	4000K	12W	1100lm	38°	700mA		40cm	75mm	110mm	50	Requires 700mA driver
10112TP/W/W	White	Warm white	3000K	12W	1100lm	38°	700mA		40cm	75mm	110mm	50	Requires 700mA driver
10112TP/W/EW	White	Extra warm white	2700K	12W	1100lm	38°	700mA		40cm	75mm	110mm	50	Requires 700mA driver
10112TP/B/W	Black	Warm white	3000K	12W	1100lm	38°	700mA		40cm	75mm	110mm	50	Requires 700mA driver


The COB IP54 Range



A-A+ 10107HC/W/W

10107HC | 7W | COB LED | Die cast

Complete with honeycomb.



10107HC/B/W




A-A+ 10107WD/W/C

10107WD | 7W | COB LED | Die cast





A-A+ 10107DB/W/C

10107DB | 7W | COB LED | Aluminium



A-A+ 10113P/AL/W

10113P | 15W | COB LED | Natural aluminium




Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⏏	⚡	⬆	📦	Notes
10107HC/W/W	White	Warm white	3000K	7W	460lm	36°	700mA	⏏	40cm	68mm	75mm	60	Requires 700mA driver
10107HC/B/W	Black	Warm white	3000K	7W	460lm	36°	700mA	⏏	40cm	68mm	75mm	60	Requires 700mA driver
10107WD/W/C	White	Cool white	4000K	7W	530lm	36°	700mA	⏏	40cm	75mm	110mm	50	Requires 700mA driver
10107WD/W/W	White	Warm white	3000K	7W	500lm	36°	700mA	⏏	40cm	75mm	110mm	50	Requires 700mA driver
10107DB/W/C	White	Cool white	4000K	7W	500lm	36°	700mA	⏏	40cm	60mm	80mm	50	Requires 700mA driver
10107DB/W/W	White	Warm white	3000K	7W	500lm	36°	700mA	⏏	40cm	60mm	80mm	50	Requires 700mA driver
10113P/AL/W	Aluminium	Warm white	3000K	15W	1000lm	50°	100-240V	⏏	-	75mm	120mm	30	Complete with 700mA driver

The COB IP64 Bathroom High Power



A-A+ 10107P/W/W


10107P | 7W | COB LED | Die cast



IP64




10107P/W/C



A-A+ 10112P/W/W

10112P | 12W | COB LED | Die cast



IP64




10112P/B/W




A-A+ 10112P/AL/W

10112P | 12W | COB LED | Natural aluminium






IP64



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⏻	⚡	⬆	📦	Notes
10107P/W/W	White	Warm white	3000K	7W	630lm	40°	700mA	III	40cm	70mm	105mm	50	Requires 700mA driver
10112P/W/C	White	Warm white	3000K	12W	1100lm	40°	700mA	III	40cm	70mm	105mm	50	Requires 700mA driver
10112P/W/W	White	Cool white	4000K	12W	1100lm	40°	700mA	III	40cm	70mm	105mm	50	Requires 700mA driver
10112P/B/W	Black	Warm white	3000K	12W	1100lm	40°	700mA	III	40cm	70mm	105mm	50	Requires 700mA driver
10112P/AL/W	Aluminium	Warm white	3000K	12W	1100lm	40°	700mA	III	40cm	70mm	105mm	50	Requires 700mA driver
10112P/MC/W	Brushed chrome	Warm white	3000K	12W	1100lm	40°	700mA	III	40cm	70mm	105mm	50	Requires 700mA driver



The IP65 Bathroom Range

	10103P 1W/3W COB LED Aluminium										1W@350mA / 3W@700mA					
 10103P/W/W										Suitable for 89004 driver.		46mm		46mm		30°
								10103P/AL/W								
	10103P 1W/3W COB LED Aluminium										1W@350mA / 3W@700mA					
 10103P/B/W										Suitable for 89004 driver.		46mm		46mm		30°
								10103P/AL/W								
	10103NP 3x1W LED Natural aluminium															
 10103NP/AL/W/35										Suitable for 89004 driver.		80mm		52mm		35°
								10103NP/AL/D/35								
	10106P 6W SMD 2835 Plastic															
 10106P/W/W												85mm		59mm		100°
								10106P/W/C								
Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes			
10103P/W/C	White	Cool white	4000K	1W/3W	200lm@3W	30°	350mA/700mA		60cm	37mm	60mm	100	Requires 350mA/700mA driver			
10103P/W/W	White	Warm white	3000K	1W/3W	190lm@3W	30°	350mA/700mA		60cm	37mm	60mm	100	Requires 350mA/700mA driver			
10103P/B/W	Black	Warm white	3000K	1W/3W	190lm@3W	30°	350mA/700mA		60cm	37mm	60mm	100	Requires 350mA/700mA driver			
10103P/B/BL	Black	Blue	-	1W/3W	-	60°	350mA/700mA		60cm	37mm	60mm	100	Requires 350mA/700mA driver			
10103P/AL/D	Aluminium	Daylight	6000K	1W/3W	210lm@3W	30°	350mA/700mA		60cm	37mm	60mm	100	Requires 350mA/700mA driver			
10103P/AL/C	Aluminium	Cool white	4000K	1W/3W	200lm@3W	30°	350mA/700mA		60cm	37mm	60mm	100	Requires 350mA/700mA driver			
10103P/AL/W	Aluminium	Warm white	3000K	1W/3W	190lm@3W	30°	350mA/700mA		60cm	37mm	60mm	100	Requires 350mA/700mA driver			
10103NP/AL/D/35	Aluminium	Daylight	6000K	3x1W	180lm	35°	350mA		200cm	70mm	70mm	50	Requires 350mA driver			
10103NP/AL/W/35	Aluminium	Warm white	3000K	3x1W	135lm	35°	350mA		200cm	70mm	70mm	50	Requires 350mA driver			
10106P/W/C	White	Cool white	4000K	6W	440lm	100°	230V		-	68mm	80mm	48	Complete with driver			
10106P/W/W	White	Warm white	3000K	6W	415lm	100°	230V		-	68mm	80mm	48	Complete with driver			

The Dark Light IP65 Range

Aluminium



A-A++ 10102H/W/W

10102H | 2W | LED | Aluminium




A-A++ 10102H/B/W

10102H | 2W | LED | Aluminium



A-A++

10107H | 7W | COB LED | Aluminium



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⏻	💡	⬆️	📦	Notes
10102H/W/C	White	Cool white	4000K	2W	100lm	30°	700mA	III	100cm	30mm	50mm	100	Requires 700mA driver
10102H/W/W	White	Warm white	3000K	2W	100lm	30°	700mA	III	100cm	30mm	50mm	100	Requires 700mA driver
10102H/B/W	Black	Warm white	3000K	2W	100lm	30°	700mA	III	100cm	30mm	50mm	100	Requires 700mA driver
10107H/W/C	White	Cool white	4000K	7W	530lm	36°	700mA	III	40cm	60mm	90mm	60	Requires 700mA driver
10107H/W/W	White	Warm white	3000K	7W	500lm	36°	700mA	III	40cm	60mm	90mm	60	Requires 700mA driver

The Fire Rated IP65 Range



A-A++

10106PF | 6W | COB LED | Fire Rated | Die cast

Ring must be ordered separately.












Dimensions are complete with the ring.



83mm



70mm



40°



050042/W White



050042/B Black



050042/C Chrome



050042A/C Chrome

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10106PF/C	Cool white	4000K	6W	530lm	40°	350mA		40cm	68mm	90mm	20	Requires 350mA driver
10106PF/W	Warm white	3000K	6W	500lm	40°	350mA		40cm	68mm	90mm	20	Requires 350mA driver

Shop Square Boxes



A-A++ 50102B/W/W

50102B | 2W | LED | Die cast




A-A++ 50102B/B/W

50102B | 2W | LED | Die cast




A-A++ 50202B/W/W

50202B | 2x2W | LED | Die cast



A-A++ 50202B/B/W

50202B | 2x2W | LED | Die cast



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
50102B/W/W	White	Warm white	3000K	2W	160lm	30°	700mA		30cm	36x36mm	60mm	100	Use 89004A driver
50102B/B/W	Black	Warm white	3000K	2W	160lm	30°	700mA		30cm	36x36mm	60mm	100	Use 89004A driver
50202B/W/W	White	Warm white	3000K	2x2W	2x160lm	30°	700mA		30cm	66x36mm	60mm	60	Use 89008A driver
50202B/B/W	Black	Warm white	3000K	2x2W	2x160lm	30°	700mA		30cm	66x36mm	60mm	60	Use 89008A driver





Shop Square Boxes



Aluminium + steel





50107B | 6,5W | COB LED | Aluminium + steel




50207B | 2x6,5W | COB LED | Aluminium + steel



50307B | 3x6,5W | COB LED | Aluminium + steel



50507B | 5x6,5W | COB LED | Aluminium + steel



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⚡	🔧	📏	📦	Notes
50107B/W/W	White	Warm white	3000K	6,5W	550lm	36°	350mA	III	40cm	57x57mm	90mm	60	Use 89008 driver
50207B/W/W	White	Warm white	3000K	2x6,5W	2x550lm	36°	350mA	III	40cm	108x57mm	90mm	36	Use 89015 driver
50307B/W/W	White	Warm white	3000K	3x6,5W	3x550lm	36°	350mA	III	40cm	150x57mm	90mm	24	Use 89020 driver
50507B/W/W	White	Warm white	3000K	5x6,5W	5x550lm	36°	350mA	III	40cm	240x57mm	90mm	16	Use 1x89015 & 1x89020 drivers



50104M/W

10104M/W


The Cement Look Recessed

Cement + black reflector




A-A++

10104M | 4,5W | COB LED | Cement + black reflector



DARK LIGHT
IP20



A-A++

50104M | 4,5W | COB LED | Cement + black reflector



DARK LIGHT
IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10104M/W	Cement	Warm white	3000K	4,5W	350lm	40°	100-240V		72mm	70mm	18	Complete with 350mA driver
50104M/W	Cement	Warm white	3000K	4,5W	350lm	40°	100-240V		72mm	70mm	18	Complete with 350mA driver




LED Decorative Range

10107C | 7W | COB LED | Ambient colour light | Die cast



A-A++

IP20



Interchangeable rings.




10107R | 5W | SMD 3030 | Aluminium



A-A++

DARK LIGHT
IP20





10103GL | 3x1W | LED | Aluminium + acrylic



A-A++

IP20
offer




10103A | 3x1W + 18 SMD LED Ring | LED | Natural aluminium + PC

Colours can be switched separately.



A-A++ Warm white + Daylight

IP42
offer




Daylight + Blue




Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⏻	⚡	⬆️	📦	Notes
10107C/W/W	White	Warm white	3000K	7W	635lm	40°	700mA	⬆️	40cm	88mm	90mm	64	Requires 700mA driver
10107R/W/W	White	Warm white	3000K	5W	270lm	-	100-240V	⬆️	-	95mm	60mm	30	Complete with 350mA driver
10103GL/D	-	Daylight	6000K	3x1W	180lm	-	350mA	⬆️	40cm	55mm	50mm	36	Requires 350mA driver
10103GL/W	-	Warm white	3000K	3x1W	135lm	-	350mA	⬆️	40cm	55mm	50mm	36	Requires 350mA driver
10103A/D/BL	Aluminium	Daylight + Blue	6000K	3/1,8W	-	-	350mA	⬆️	40cm	77mm	50mm	100	Requires 2x350mA drivers
10103A/W/D	Aluminium	Warm white + Daylight	3000K+6000K	3/1,8W	-	-	350mA	⬆️	40cm	77mm	50mm	100	Requires 2x350mA drivers




The LED Glass Range

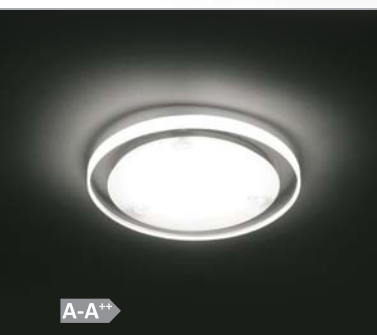


10101G | 1W | LED | Acrylic





Suitable for 89004 driver.




10103G | 3W | LED | Acrylic



Suitable for 89004 driver.

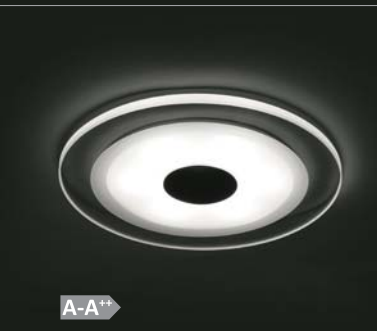

10106G | 6W | LED | Acrylic



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	⏻	💡	⏏	📦	Notes
10101G/D	Clear	Daylight	6000K	1W	60lm	350mA	III	40cm	40mm	45mm	80	Requires 350mA driver
10103G/D	Clear	Daylight	6000K	3W	145lm	350mA	III	40cm	66mm	50mm	64	Requires 350mA driver
10103G/W	Clear	Warm white	3000K	3W	100lm	350mA	III	40cm	66mm	50mm	64	Requires 350mA driver
10106G/D	Clear	Daylight	6000K	6W	295lm	350mA	III	40cm	100mm	60mm	32	Requires 350mA driver
10106G/W	Clear	Warm white	3000K	6W	205lm	350mA	III	40cm	100mm	60mm	32	Requires 350mA driver



10101C/C/D



50101/AL/D

LED Spots



A-A**

10101C | 1W | LED | Cabinet light | Steel



IP20
offer



A-A** 50101/AL/D

50101 | 9x0,2W | LED | Natural aluminium




IP20
offer



offer

50101/AL/BL

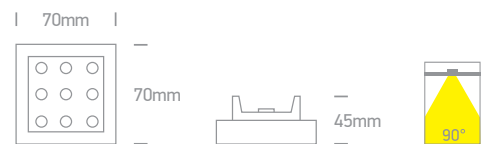

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⏻	⚡	⏏	📦	Notes
10101C/C/D	Chrome	Daylight	6000K	1W	50lm	90°	12V AC	⚡	30cm	50mm	25mm	100	Requires 12V AC transformer
50101/AL/D	Aluminium	Daylight	6000K	9x0,2W	60lm	90°	230V	⚡	-	60mm	40mm	50	Complete with driver
50101/AL/BL	Aluminium	Blue	-	9x0,2W	-	90°	230V	⚡	-	60mm	40mm	50	Complete with driver



50103GT4/W



10107BT/W/W



10107BT/B/W

The Trimless Range



A-A++ 10107BT/W/W

10107BT | 7W | COB LED | Trimless | Die cast



A-A++ 10107BT/B/W

10107BT | 7W | COB LED | Trimless | Die cast



A-A++

50103GT4 | 2,5W | SMD LED | Trimless | Gypsum




Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⚡	🔧/🔩	📏	📦	Notes
10107BT/W/W	White	Warm white	3000K	7W	500lm	38°	700mA	III	40cm	83mm	90mm	30	Requires 700mA driver
10107BT/B/W	Black	Warm white	3000K	7W	500lm	38°	700mA	III	40cm	83mm	90mm	30	Requires 700mA driver
50103GT4/W	White	Warm white	3000K	2,5W	15lm	-	100-240V	I	-	121x121mm	70mm	24	Complete with 700mA driver





The Trimless Mini Range

Aluminium

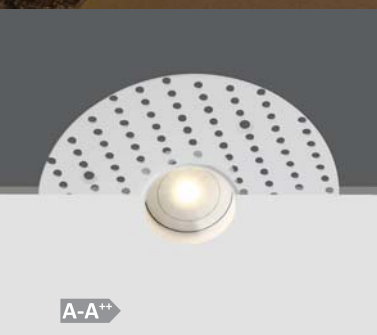


10101TR | 1W | COB LED | Trimless | Aluminium

Driver can not pass through the cutout hole.

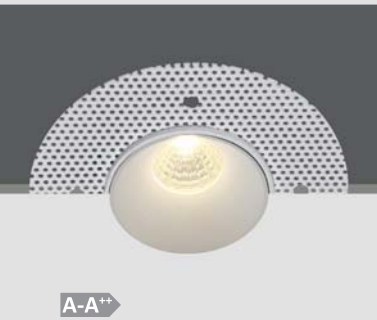

10103TR | 3W | COB LED | Trimless | Aluminium

Driver 89004 can pass through the cutout hole.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⏏	⏏	⏏	⏏	Notes
10101TR/W/W	White	Warm white	3000K	1W	90lm	45°	350mA	III	200cm	40mm	50mm	40	Requires 350mA driver
10103TR/W/W	White	Warm white	3000K	3W	250lm	36°	350mA	III	40cm	50mm	50mm	60	Requires 350mA driver 89004



10103BTR/BS/W



10103BTR/B/W

The Trimless Mini Range


Aluminium




10103BTR | 3W | COB LED | Aluminium



10103BTR | 3W | COB LED | Aluminium



10103BTR | 3W | COB LED | Aluminium



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⚡	🔧	📏	📦	Notes
10103BTR/W/W	White	Warm white	3000K	3W	240lm	36°	350mA	III	40cm	40mm	80mm	100	Requires 350mA driver
10103BTR/B/W	Black	Warm white	3000K	3W	240lm	36°	350mA	III	40cm	40mm	80mm	100	Requires 350mA driver
10103BTR/BS/W	Brass	Warm white	3000K	3W	240lm	36°	350mA	III	40cm	40mm	80mm	100	Requires 350mA driver